



SECURITY & SMARTHOME

We hope you enjoy your new IQ Panel security and smart home platform. It will serve as the “brain” of your home for many years to come. With it you can control your lights, locks, thermostat, security and much more.

You won't need a manual to operate your IQ Panel, but you can use this guide to learn more about the features of this amazing new device. We hope it will add to your home's decor and make your home smarter and more energy efficient!

Let's start by connecting your power. (Note: If your panel has been professionally installed, skip this page)



Plug in the power connector



Route the wire behind the retainer clip



Insert the wire into the strain-relief

Now let's put on your cover and attach the table stand.



Place the top of the cover onto the panel's back plate



Push the cover down until it snaps in place




Insert the table stand into the mounting holes and push upward until it snaps into place

Plug in your panel, power it on



Plug in the power supply provided with your panel

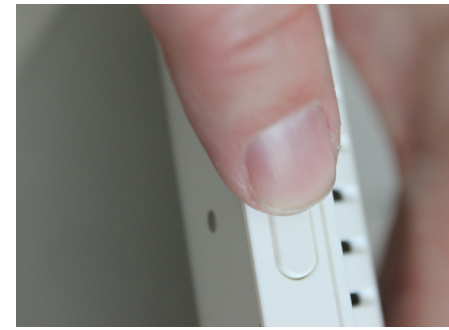


Push and hold the standby button on the side of the panel for 3 seconds



Once the panel powers up, the home screen will appear.


Navigation


Move from page to page and access information on each page using finger touches, swipes, and scrolling.

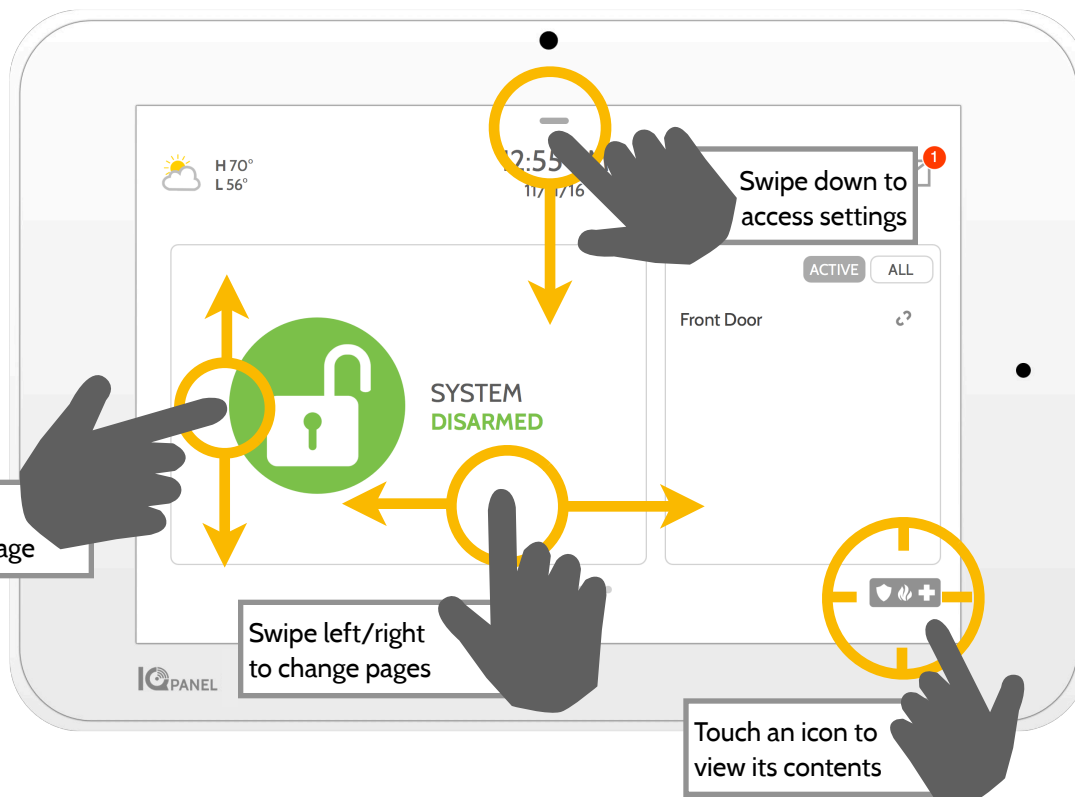

Dismiss

To dismiss a pop up when you are done, swipe left or right to dismiss.

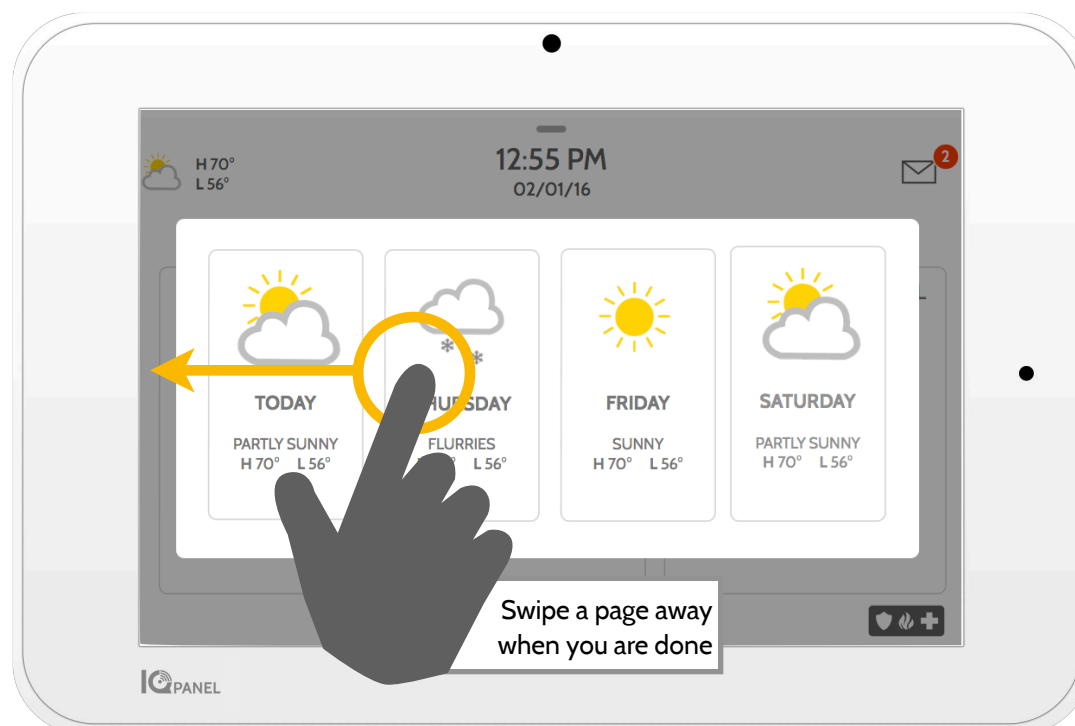


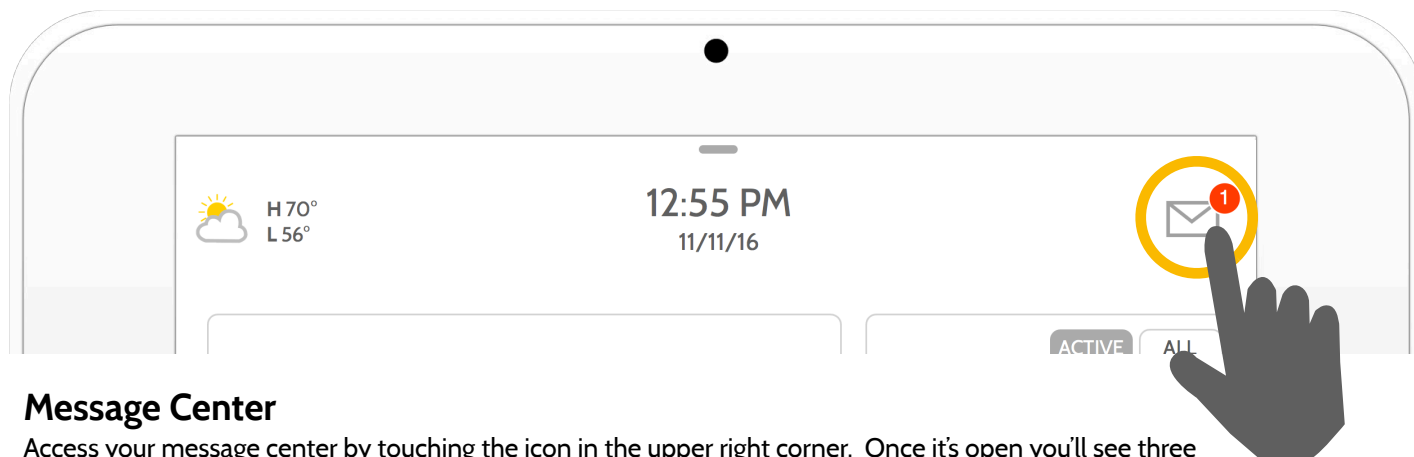

Message Center


Access your message center by touching the icon in the upper right corner. Once it's open you'll see three sections: Contact, Video Tutorials, and Messages/Alerts/Alarms

(Note: This icon may appear different than shown, depending on your provider's settings)

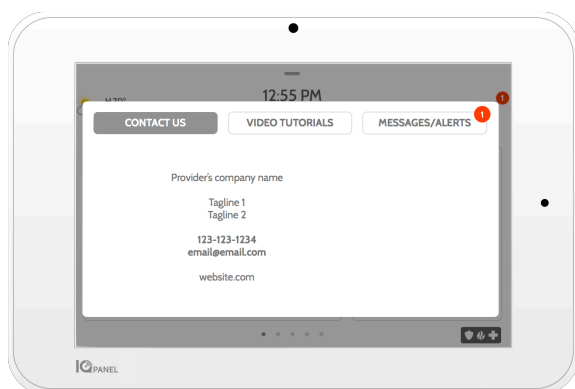

Contact

Easy access to your provider's contact information, including phone number, email, and website.

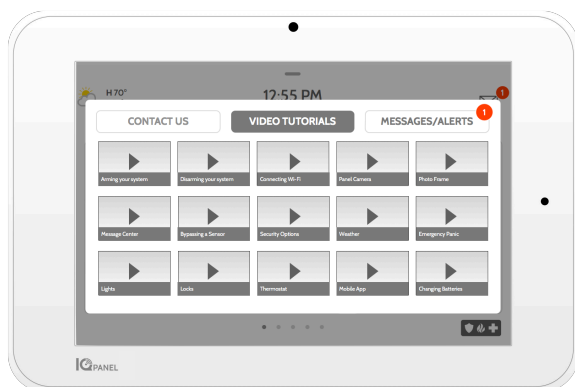


Video Tutorials

Watch videos to help you understand your system and service better.

To watch a video, touch a thumbnail. Video will begin playing automatically.

Video controls appear on screen. To exit, touch the "back" button.

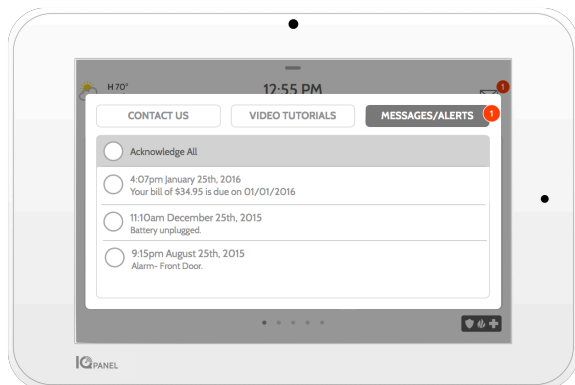


Messages/Alerts/Alarms

Get messages from your system like low battery alerts, alarms, and power failures. Messages from your provider will also appear here.

To dismiss, touch the circle to the left of the message and touch "OK" to remove it from your message center.


You can also remove all messages at once by touching "Acknowledge All"

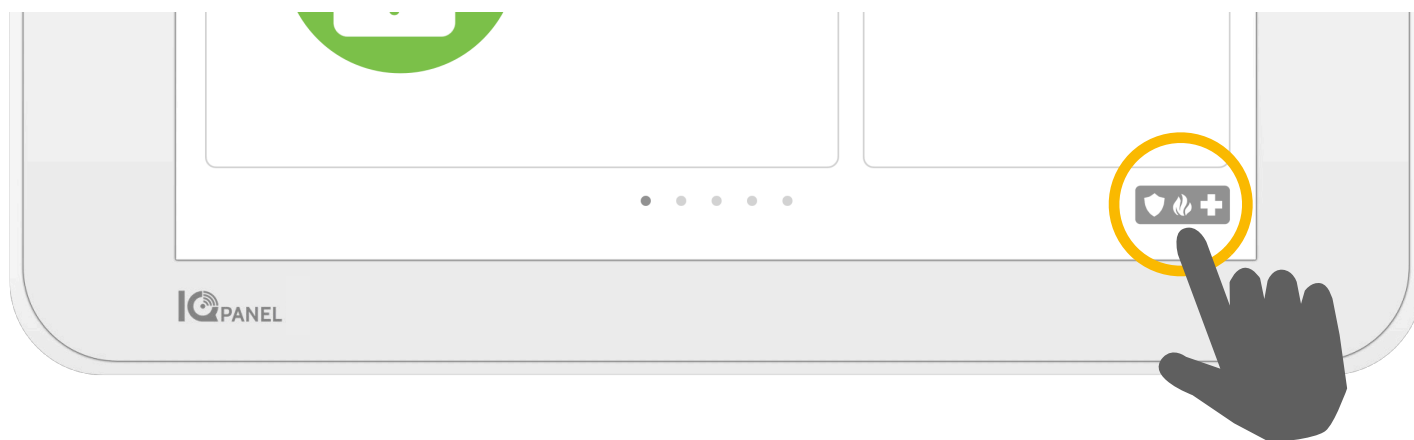

Emergency Panic


If you have a police, fire, or medical emergency and your system is not armed or a sensor has not been triggered, you can send a manual emergency panic by touching the icon in the bottom right corner and selecting the type of emergency you are experiencing. *(Note: based on your location, not all options may appear or be available to you.)*

There's a stranger in my backyard!

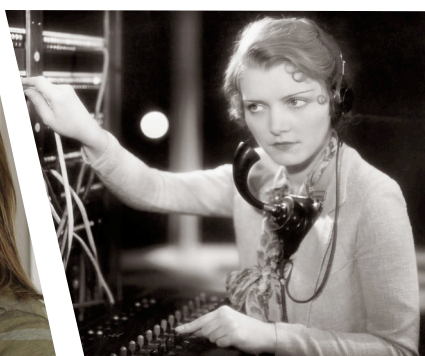

Two-Way Voice

If your provider offers Two-Way Voice service you'll be able to speak to the monitoring agent from the speakers and microphone built right into your panel.

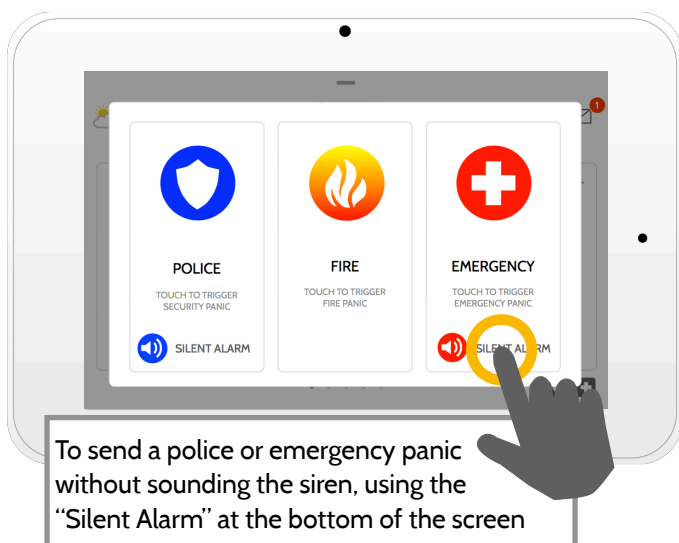

Alarm Types



Police: When touched it triggers the "Police" siren pattern and sends a police emergency signal to your provider's monitoring station.



Fire: When touched it triggers the "Fire" siren pattern and sends a fire emergency signal to your provider's monitoring station.




Emergency: When touched it triggers the "Emergency" siren pattern and sends an emergency signal to your provider's monitoring station.



Canceling an Emergency Panic

To cancel an emergency panic, touch the "cancel" button and enter a valid user code.


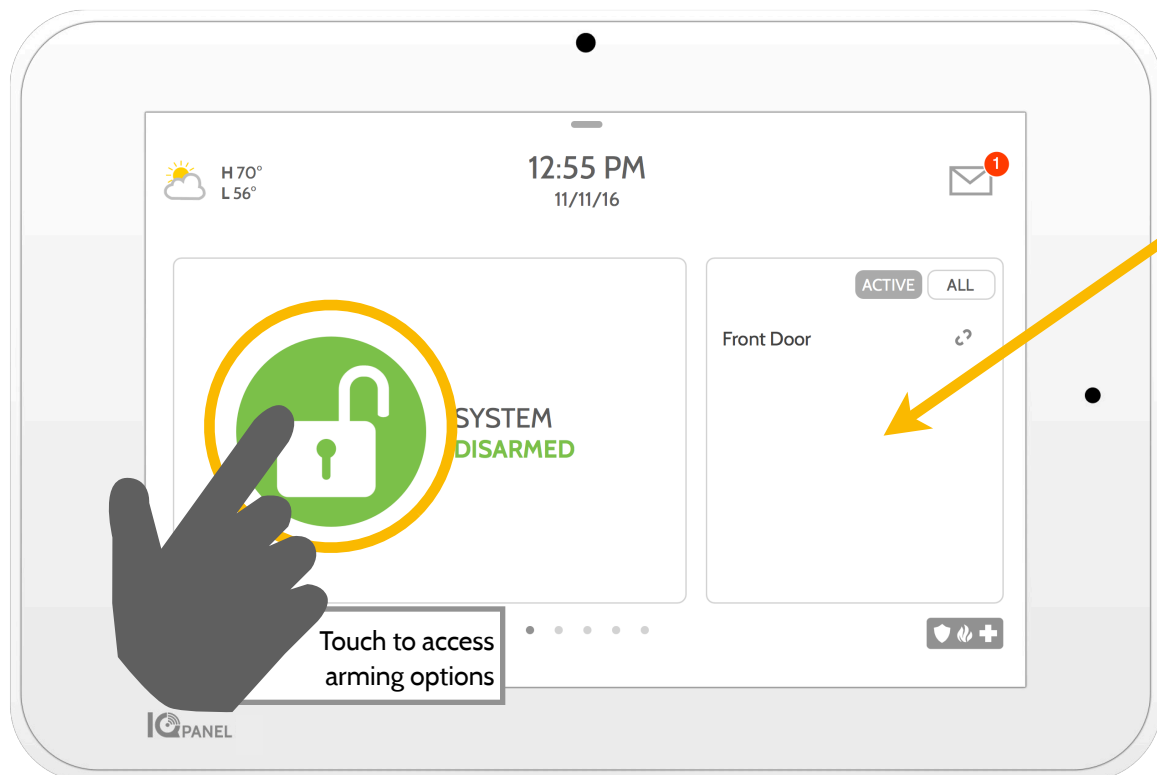


Sensor List

Open or active sensors appear in a scrollable list on the right. Touch the icons in the upper right corner to switch your view to either “Active” or “All” sensors.

Sensor status:

-  Open
-  Closed
-  Active
-  Idle
-  Unreachable
-  Tampered

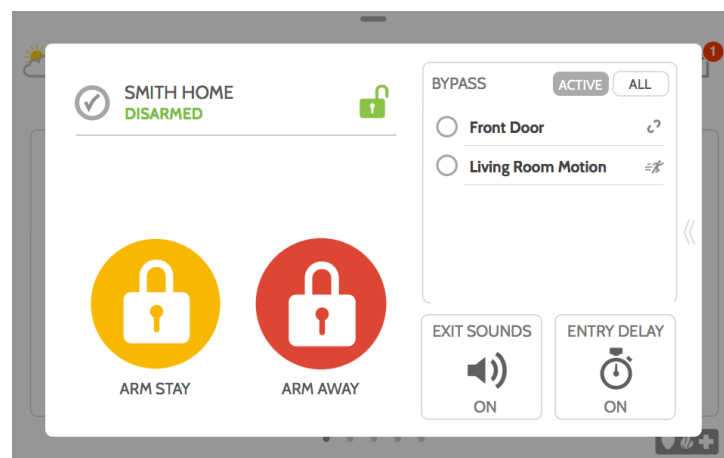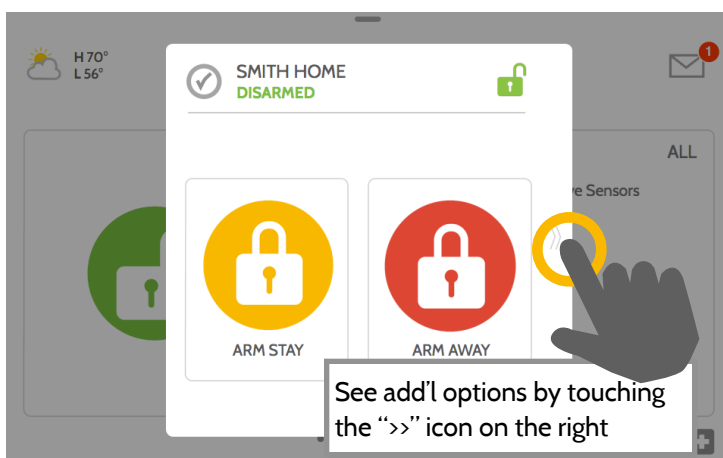

Arming Options

Quickly choose from “stay” or “away”



Arming Stay

Arms doors and windows only



Arming Away

Arms doors, windows and motions



Additional Options

View additional arming options by touching the “>>” icon on the right side.

Additional Arming Options

Select these options before choosing your arming type



Bypass

Touch the circle next to a sensor to bypass it during the arming sequence




Exit Sounds

The panel beeps as the timer counts down. Silence these beeps before you choose the arming type.



Entry Delay

The panel will give you time to disarm once a “delay door” has been opened. Turn this off with a touch.

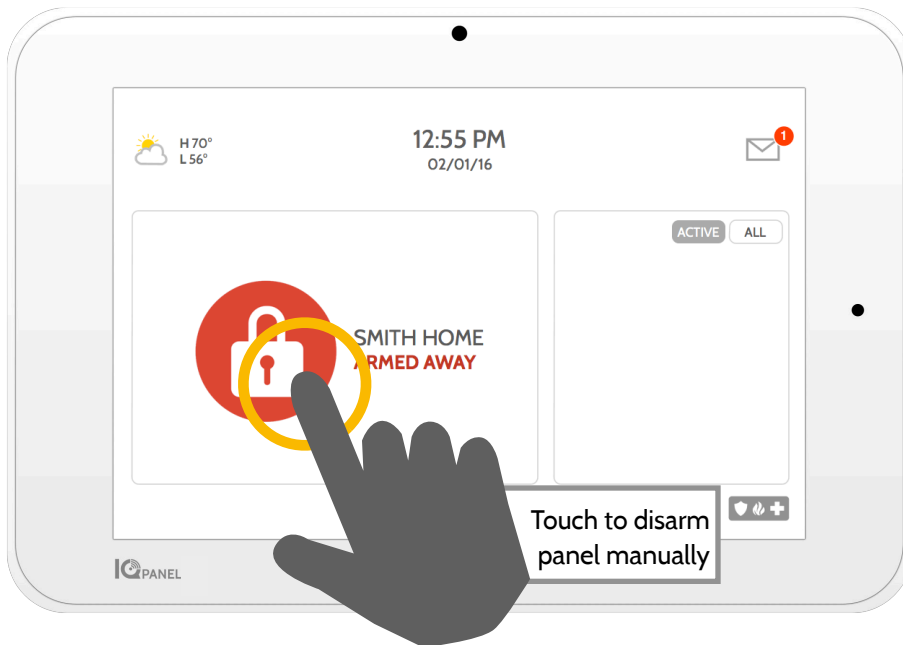

Disarming your System

When your system is armed, there are multiple ways to disarm:



Disarming Manually

To manually disarm your panel, touch the icon in the center of the screen. You will be prompted to enter a valid code. Failure to enter a valid code with the time required will trigger the alarm.



When someone manually disarms the panel the built in camera will take a photo and save it on the camera page along with the date, time, and name of the user.




Disarming Remotely

To remotely disarm your panel, login to your mobile app and touch the "disarm" icon.



Download the Alarm.com app in the App store or Google Play

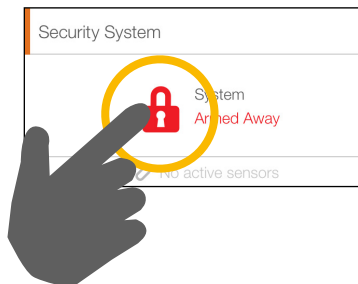


Disarming Automatically

You can connect your smartphone using Bluetooth and it will automatically disarm your IQ Panel from an "Armed Away" state when it comes within range. To connect a phone, follow the steps shown.



Bluetooth Touchless Disarming



Step 1:
Swipe down to access settings tray



Step 2:
Touch "SETTINGS"



Step 3:
Touch "ADVANCED SETTINGS"



Step 4:
Enter your code



Step 5:
Touch "BLUETOOTH DEVICES"

Step 6:
Put your Bluetooth device in "pairing" mode.



Step 7:
Touch "ADD DEVICE" The panel will begin searching for new devices in range (It may take up to 60 seconds)

Step 8:
Select your device from the list



Step 9:
Touch "Pair"

Step 10:
When the messages appear on your phone and IQ Panel, ensure the numbers match and touch "Pair" on each.



**You can connect up to five (5) smartphones for touchless disarming. You may need to enable this setting in your Bluetooth settings.*

Alarms

If the alarm is triggered the IQ Panel will sound the siren and display a red alarm screen.




If your provider offers monitoring service, the panel will automatically contact your monitoring center using the dual path LTE and Wi-Fi connection.

To disarm, touch the screen and enter your passcode.

Two Way Voice

The built in microphones on the bottom of the panel and the Two-Way Voice speaker on the side of the panel activate after a connection to the monitoring station has been made.

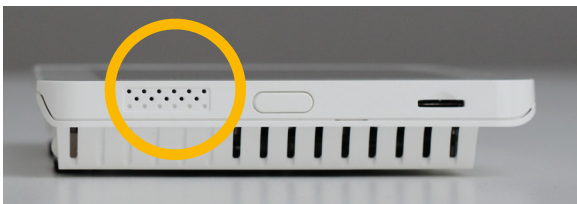

Speakers are located on each side of the panel



Microphones are located on the bottom of the panel

False Alarms

In the event of a false alarm, press disarm and enter your user code. If your system is monitored, be ready to provide your verbal password to your security provider's monitoring agent if they contact you. If you are NOT able to provide the correct verbal passcode, the authorities may be contacted.



Police

When the system is armed and the alarm is tripped or you touch the "Police" emergency button the alarm sounds with the "Intrusion" siren and then activates the Two-Way Voice microphone and speaker, if available.



Fire

When a Smoke or Carbon Monoxide detector is triggered or someone taps the "Fire" panic on the IQ Panel the alarm sounds with the "Fire" siren and then activates the Two-Way Voice microphone and speaker, if available.



Emergency


When you press an IQ Pendant or trigger an emergency signal from the IQ Panel, the alarm sounds with the "Emergency" siren and then activates the Two-Way Voice microphone and speaker.

Preventing false alarms:

False alarms are a terrible waste of your public service resources, and can erode your relationship with local authorities. In some areas, authorities even charge a fee for false dispatches.

Here's some tips for avoiding false alarms:

- Use your system regularly, be comfortable with its operation.
- Make sure everyone who has access to your home has a valid access code and is familiar with how to use the system.
- Ensure the doors you use the most are set up with delays to give you enough time to disarm the system when you open a door.
- Test your system regularly
- Develop a routine.
- Use alternative methods for arming and disarming (mobile app, bluetooth disarming, etc.)

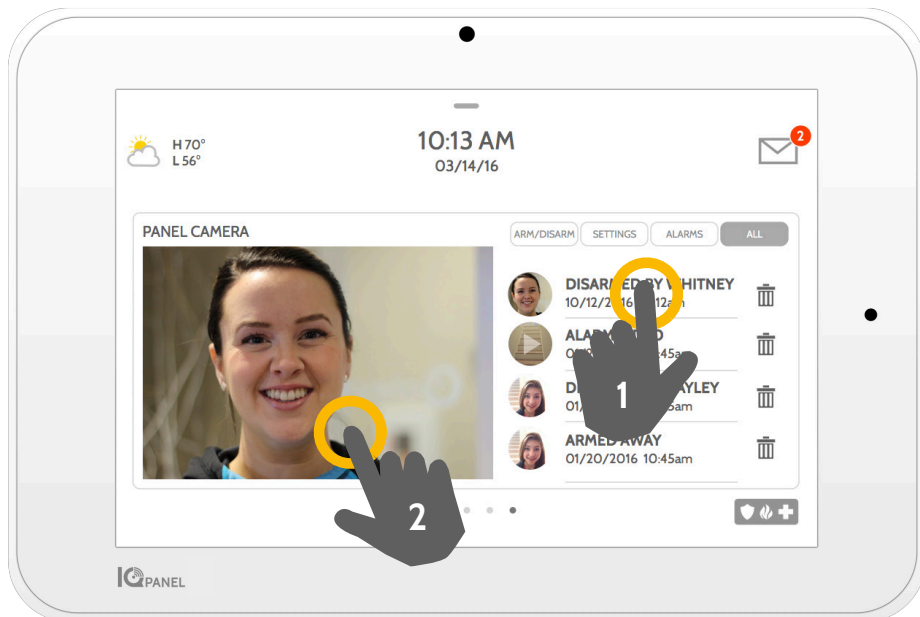

Camera Page

Your IQ Panel's built in camera captures photos in a variety of situations:



Disarm Photos

When the panel is disarmed manually, the built in camera takes a photograph and saves it in the "ARM/DISARM" section. These photos are accompanied by the username of the individual who's code was used, the date, and the time.



Settings Photos

When someone attempts to access your panel settings with an invalid code, the built in camera takes a photograph and saves it in the "SETTINGS" section. These photos are accompanied by the date and time.



Alarm Photos

When the alarm is triggered, the built in camera takes a photograph and saves it in the "ALARMS" section.



Alarm Videos


When the alarm is triggered, the built in camera will record up to a 4 minute video clip. This video is stored locally on the panel only.

1- View Photo

Touch a photo thumbnail on the right to view it on the left.

2- Full Screen

Touch the photo on the left to view it full screen. Touch it again to return to the camera page.

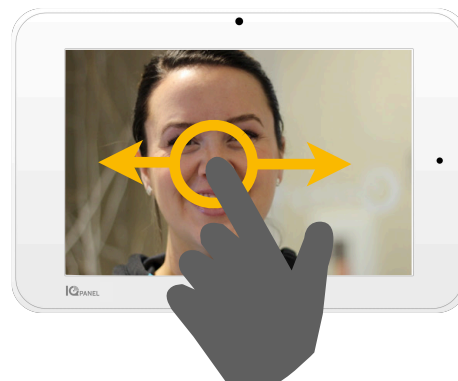

Note: While viewing photos full screen you can swipe left/right to view additional photos

Photos to your Phone



Customer Login

Password

☒ Remember Me
 [Login Help?](#)

Alarm.com/Login
Get your username and password from your provider



Click the "Image Sensor" tab



Click "Rules & Alerts"

Capture Alarm And Disarm Images
When the panel goes into alarm, or the panel is locally disarmed, the panel camera image will be captured and saved to the panel.

Click "Capture Alarm And Disarm Images" to customize

USING YOUR SYSTEM: SETTINGS

HOW TO ACCESS:

Settings Tray

Access common settings by swiping down from the top of the screen.

Security Status

See your panel's security status in the upper right. Touch it to go directly to the security page

Volume

Slide left/right to adjust the panel voice

Settings

Touch to access the full settings page. From there you can also access "Advanced Settings" (which will require a passcode)

Messages & Alerts

Touch to access the message center including your provider's contact information, video tutorials, and system messages

Photo Frame

Touch to access the photo frame where you can customize the panel's screensaver

Close Tray

Swipe up to close the tray

Clean Screen

Disables the screen for 30 seconds to allow you to clean it without accidentally touching anything. (Touch the "standby" button on the side of the panel to cancel)

Battery & Radios

Touch an icon to get more information


- Battery level
- Wi-Fi connection
- Bluetooth status
- LTE connection

Brightness

Slide left/right to adjust the screen brightness

Language

Touch to change panel language

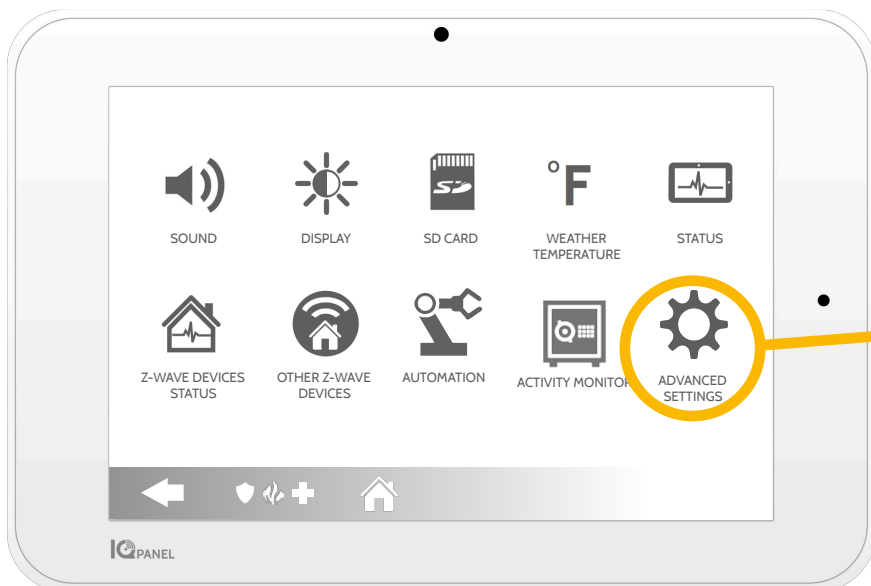

Settings Page

From here you can adjust individual sound settings, change your weather temperature from Fahrenheit to Celsius, see the status of your security and smart home devices, and more.

Advanced Settings

Only the Master code can access this area. From here you can manage users, run system tests, reboot your system, connect Bluetooth and Wi-Fi and more.



Advanced Settings: Can only be accessed using the Master code.

User Management

Program up to 242 individual user codes for each person that needs access to the system. Assign a name to each code so that you know who disarmed the system.

Power Down

Use this option if needing to shut the system down for any reason. Shutting the system down any other way can cause potential issues.

Bluetooth Devices

Easily turn on the bluetooth radio from here. This allows you to use the touch-less disarming feature. You can add, delete and edit your devices from here.

About

View important information about your system such as: current software version, IMEI, hardware version, etc. This is a great place to look if troubleshooting an issue with Tech Support.

System Tests

Perform various system test to ensure your system is working properly. This is another great place to go if troubleshooting an unknown issue with the system.

Edit Sensor

Don't like the names of your sensors? Easily customize your sensor names from here. You can also adjust the chime type and turn Voice Prompts on and off from here.

Panel Reboot

Use this option if needing to restart your panel. If you're experiencing problems with your system, try performing a panel reboot. Often times, a system restart can help a system run more smoothly.

Sound

From the sound menu, you can adjust the volumes to your panel voices, beeps and chimes, and video tutorials. You can also edit sensor chimes, Z-Wave device prompts, Trouble Beeps and touch sounds.

Wi-Fi

Connect the system to an internet connection to ensure the panel has a second path of communication. This will help speed up the communication time to the central station and greatly improve speed when controlling home automation.

Important Note

If for some reason you are unable to access the settings screen and need to reboot the system, you can do a hard reboot by holding the power button on the side for 30 seconds. This should only be done if absolutely necessary.



For additional help and questions on Advanced Settings, please reach out to your security dealer.

Photo Frame

When your panel is not in use, it turns into a customizable photo frame.



Settings

Inside settings you can choose whether you want photos or a weather clock, if you want the panel to turn itself off automatically in the evenings, and more.

Add Photos

To add your own photos:

- 1 Save your Photos onto a Micro SD card in a folder called "Photos"
- 2 Insert your SD card into the slot on the side of the panel



- 3 Touch "ADD" 
- 4 Touch each photo you wish to use or choose "Select All"
- 5 Choose either "Add" or "Replace"





Add: Does not delete the photos already on the panel, only adds the photos you selected



Replace: Deletes the photos already on the panel and replaces them with the new photos you selected

- 6 Wait at least 60 seconds after the photos have copied to remove the SD Card

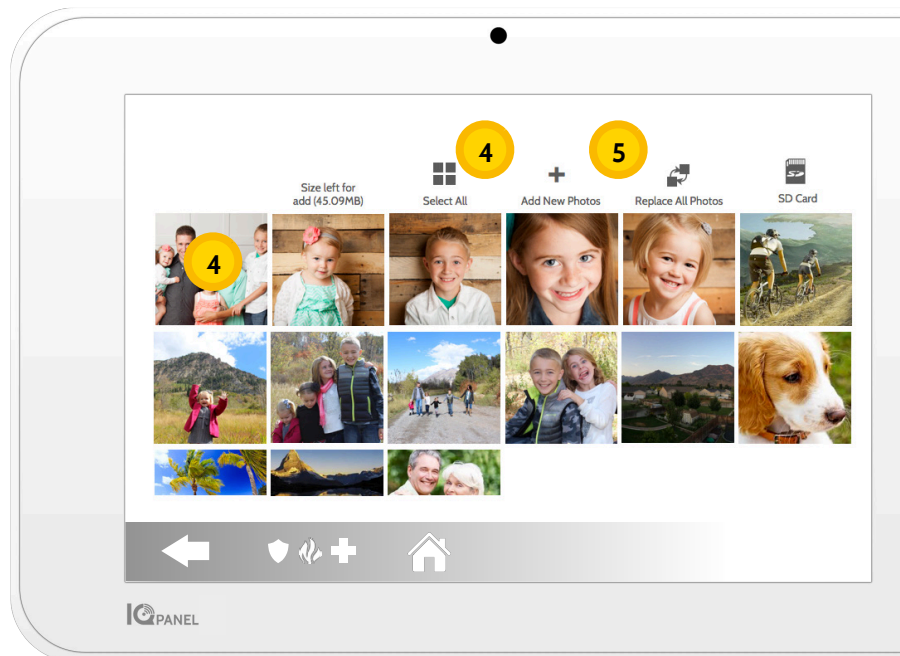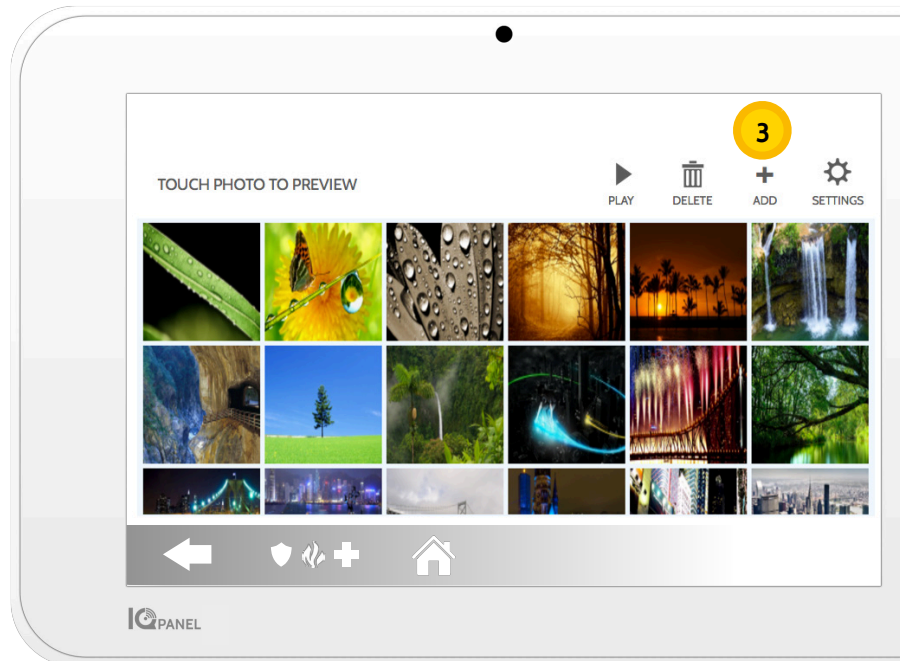

DELETE

Delete

Touch a photo to select it. Touch "Delete" to delete it from your panel

User Types

You can add up to 242 users to your system, each with a custom name and access level you allow.

Master: Access panel functions, camera, and system settings.

User: Access panel functions, camera, but NOT system settings.

Guest: Used to give arm and disarm access to those users who will use the panel on a temporary basis


Expiration Date: Choose a specific date that will disable a user code automatically.



Notifications

By creating individual users, you can set up custom text notifications when they access or use your system, keeping you connected no matter where you are.

How to Add a New User



Step 1:
Swipe down to access settings tray



Step 2:
Touch "SETTINGS"



Step 3:
Touch "ADVANCED SETTINGS"




Step 4:
Enter your code*



Step 5:
Touch "User Management"



Step 6:
Touch "Add User"

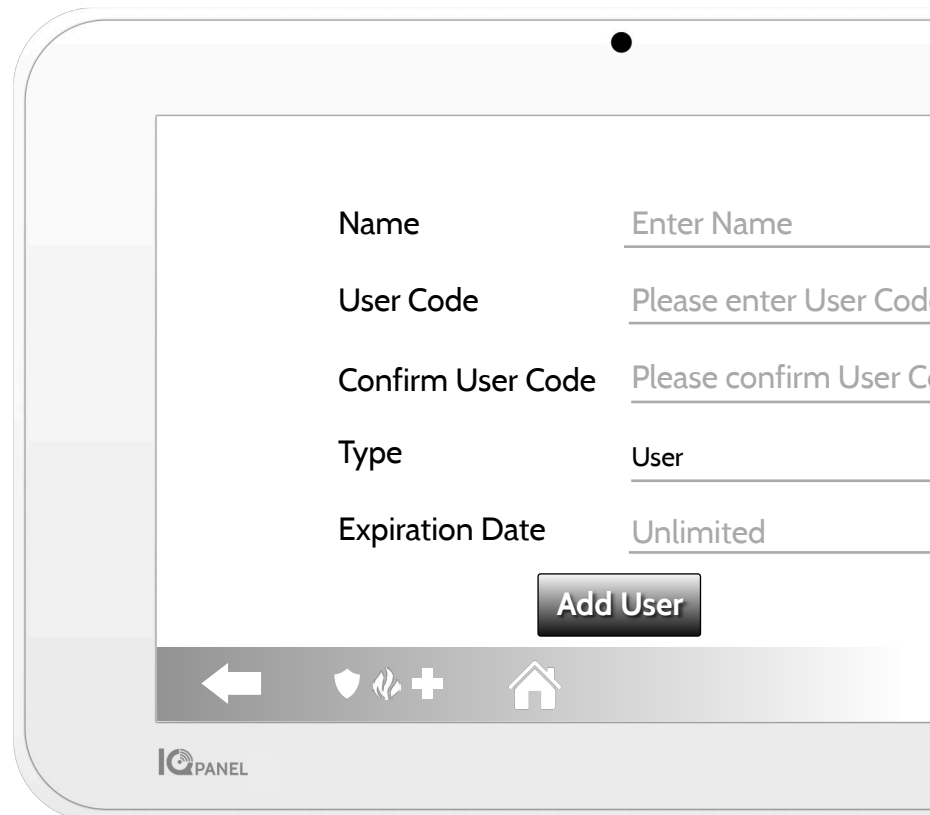

The Add User screen displays a form with the following fields and options:

Name	Enter Name
User Code	Please enter User Code
Confirm User Code	Please confirm User Code
Type	User
Expiration Date	Unlimited
Add User	

At the bottom of the screen is a navigation bar with icons for back, shield, plus, and home. The ICPANEL logo is visible in the bottom left corner.

Add User Screen

Once on the "Add User" screen you can create a custom name and user code and indicate whether you want this person to be a Master, User, or Guest.

*Default master code is 1234. For security purposes this code should be changed once the system has been installed in your home

Testing Regularly

You should test your system regularly to ensure it is operating at peak efficiency. The IQ Panel has a number of tests built in that are easy to perform:



Wi-Fi Test

Run this test every 30 days or if the IQ Panel's Wi-Fi connection seems to be failing.



Sensor Test

Run this test every 30 days. As you start the test, open and close your doors, windows, and move in front of your motion sensors to ensure they work as expected.



Cellular/LTE Test

Run this test if your panel seems to have lost its ability to send and receive signals.



Image Sensor Config

Run this test if your image sensors stop working



Z-Wave Test

A series of Z-Wave tests to optimize your smart home network. "Reconfigure network" is your most useful test, repairing your network for you.



Dual Path Test

Run this test if your panel seems to have lost its ability to send and receive signals.



Panel Glass Break Test


Use this to test your panel's microphone



Panel Test

Use this every 30 days to test a variety of panel functions

How to Access System Tests



Step 1:

Swipe down to access settings tray



Step 2:

Touch "SETTINGS"



Step 3:

Touch "ADVANCED SETTINGS"



Step 4:

Enter your master code*



Step 5:


Touch "System Tests"

Encounter a Problem?

If you encounter a problem with your system, contact your provider right away.




Touch "Message Center" in the upper right corner of your panel to get your provider's contact information

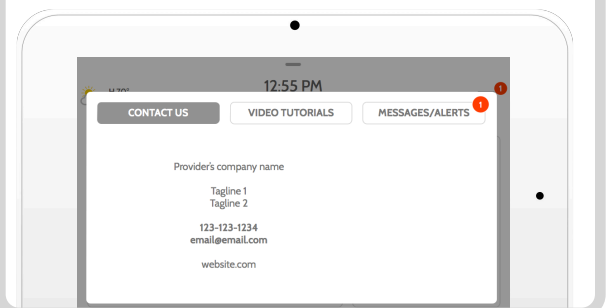

**Default master code is 1234. For security purposes this code should be changed once the system has been installed in your home*

Light Control

You can add up to 80 Z-Wave lights, lamp modules, or lightbulbs to your IQ Panel. This will allow you to control your lights locally on the panel and also from your mobile app. Once your first light is added to your system, the lights page will appear. Simply swipe over to access it.

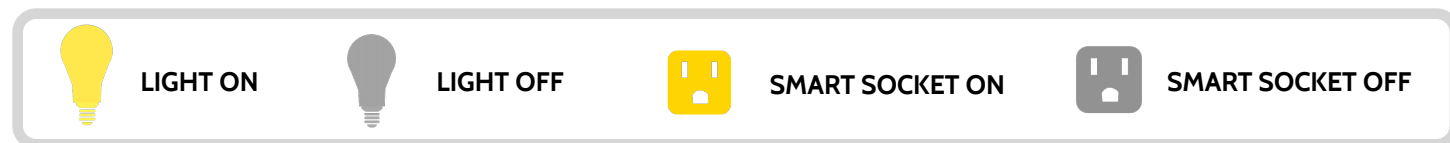


Dimmer

Touch the slider from left to right to adjust the brightness of a single dimmer

ON/OFF

Touch a bulb or outlet icon to turn it on or off

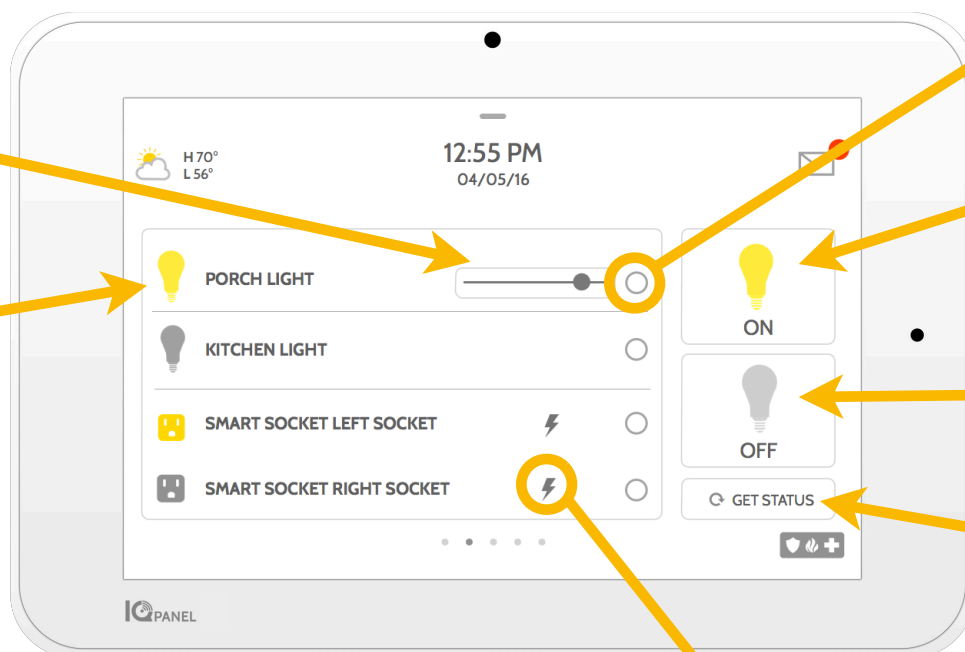

Select

Touch the circle next to a light to select it

ON

Touch turn on all selected lights

OFF



Touch turn off all selected lights

GET STATUS

Touch to check the status of all selected lights

Energy

Touch the energy icon to see how much energy the outlet is currently using

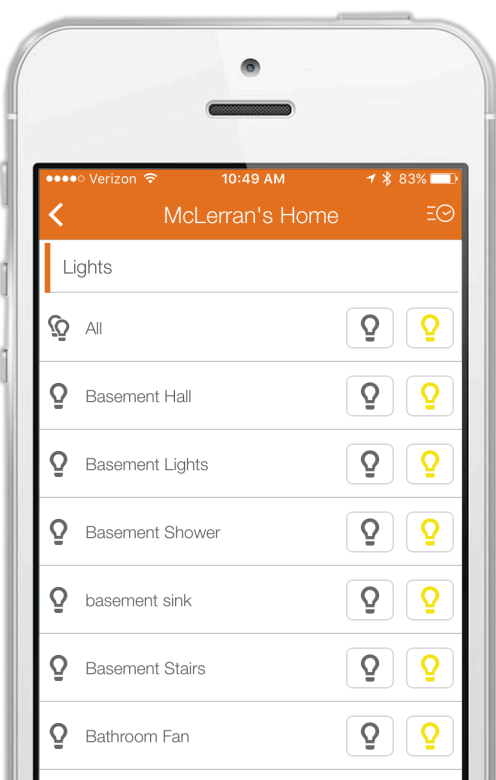
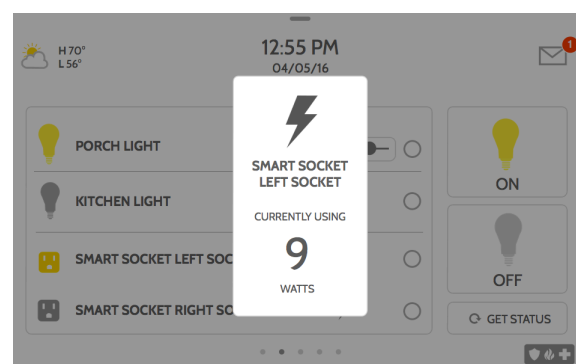


Mobile Access

You can also control your lights from your mobile app.

Lock Control

You can add up to 6 Z-Wave locks to your IQ Panel. This will allow you to control your locks locally on the panel and also from your mobile app. Once your first lock is added to your system, the lock page will appear. Simply swipe over to access it. If you have more than one lock swipe up and down to access each one.

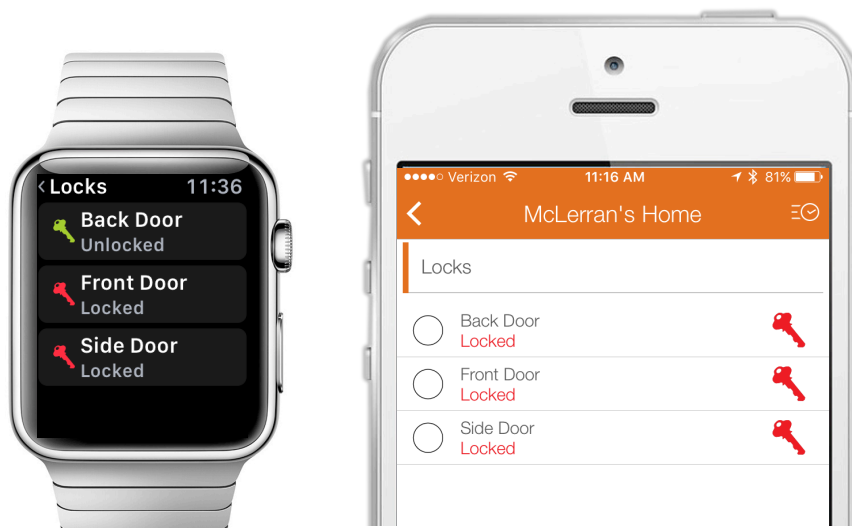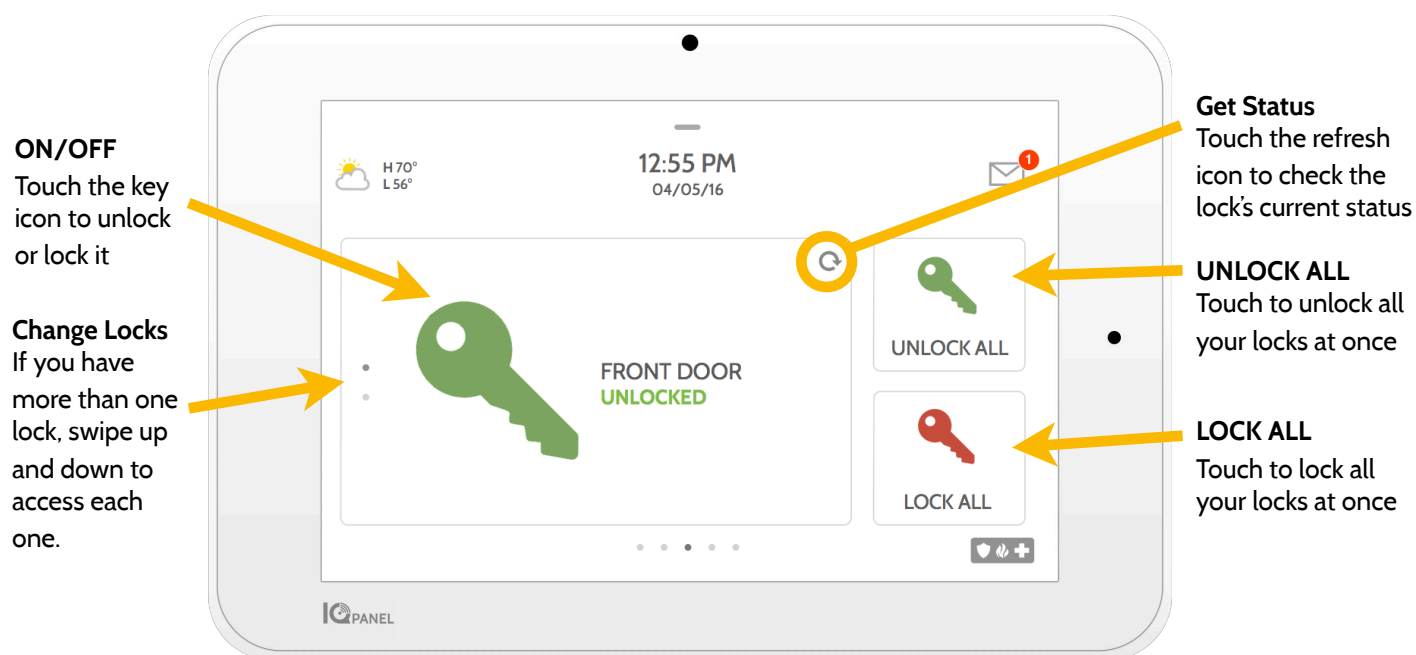

Mobile Access


You can also control your locks from your mobile app.

Thermostat Control

You can add up to 6 thermostats to your IQ Panel. This allows you to control the temperature in your home locally on the panel and also from your mobile app. Once your first thermostat is added to your system, the thermostat page will appear. Simply swipe over to access it. If you have more than one thermostat swipe up and down to access each one.


Up/Down
Touch the arrows to adjust the target temperature

Switch
If you have more than one thermostat, swipe up and down to access each one.

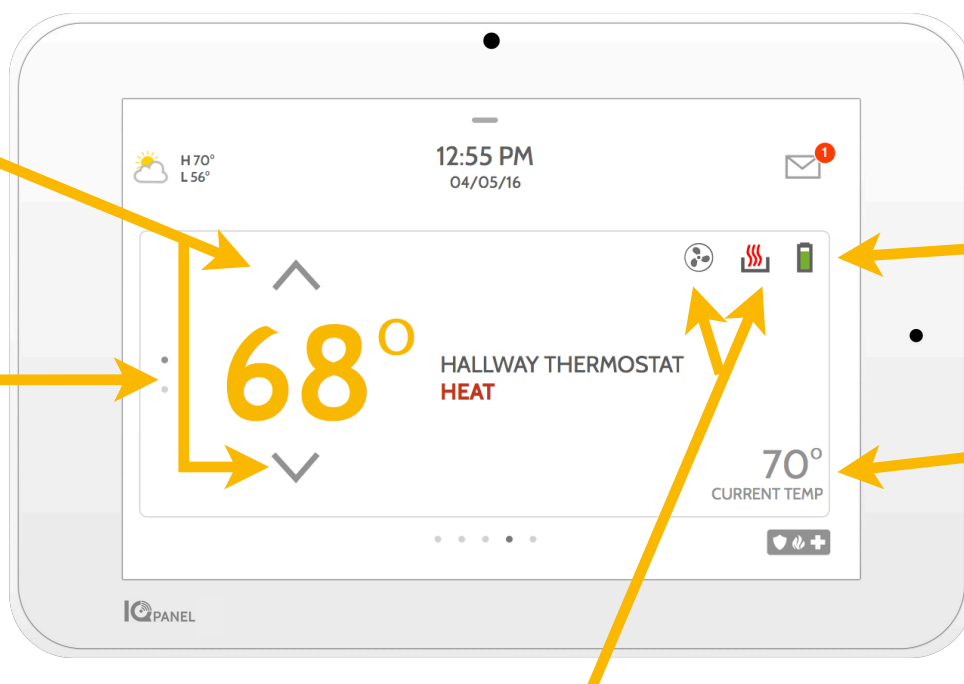


Battery level
Displays how much battery is left in your thermostat

Current Temp
Displays the current temperature in your home



Fan
Touch to change to "On" or "Automatic"

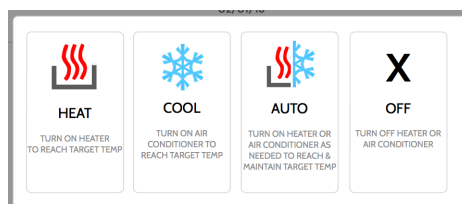

Mode
Touch to change this thermostat from heat to cool (or off) or use "automatic" which switches from heat to cool as needed to maintain your target temperature.



Mobile Access
You can also control your thermostat from your mobile app.

Garage Control

You can add up to 10 Z-Wave overhead garage door controllers to your IQ Panel. This allows you to control the door from your panel and also from your mobile app. Once your first garage opener is added to your system, the garage page will appear. Simply swipe over to access it. If you have more than one overhead garage door swipe up and down to access each one.




Open/Close

Touch the icon to open or close the garage door

Switch

If you have more than one garage door, swipe up and down to access each one.

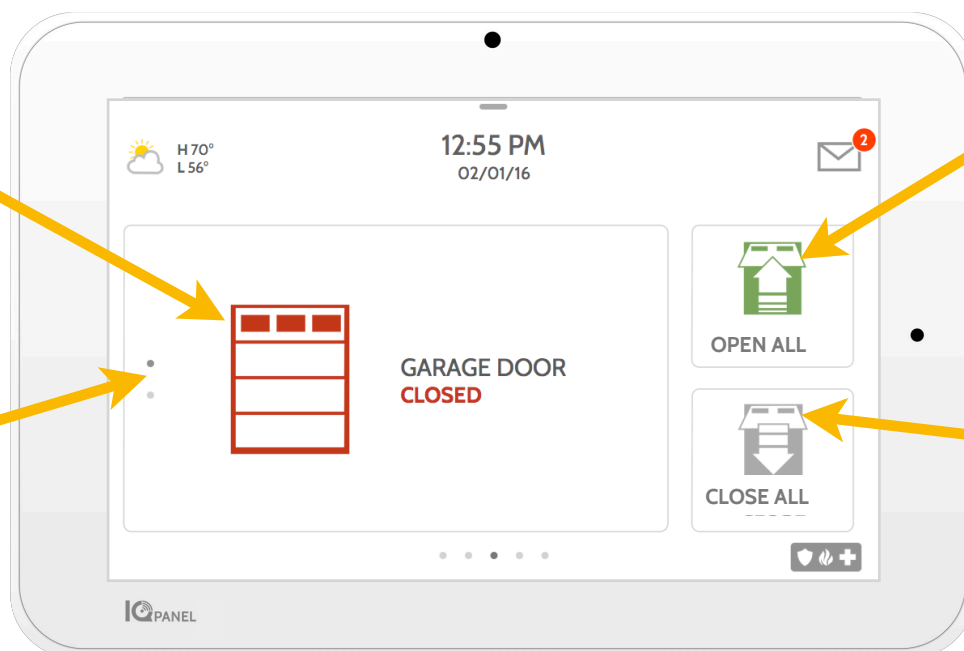

Open

Touch the icon to open the garage door (not available when the garage door is already closed)

Close

Touch the icon to close the garage door (not available when the garage door is already closed)



Live View

Easily view the live video feed from your Alarm.com video cameras on the 7" panel screen. This page will appear automatically if cameras are added to the account and the authorization has been given on the Alarm.com customer website. Supports live view of up to 40 cameras. Supported models: ADC-V521IR, ADC-V522IR, ADC-V622, ADC-V722W, ADC-VC725, ADC-VC726, ADC-VC825 & ADC-VC826.

Camera View


A thumbnail of the camera will be displayed for the highlighted camera. Click the play button to view full screen.

Cameras List

All supported cameras that are on the account and have been authorized will show here. Click the camera you would like to view.

Important Note

Cameras will only push to your panel if you have authorized them to do so from your Alarm.com customer website. This can be found under Video Settings.

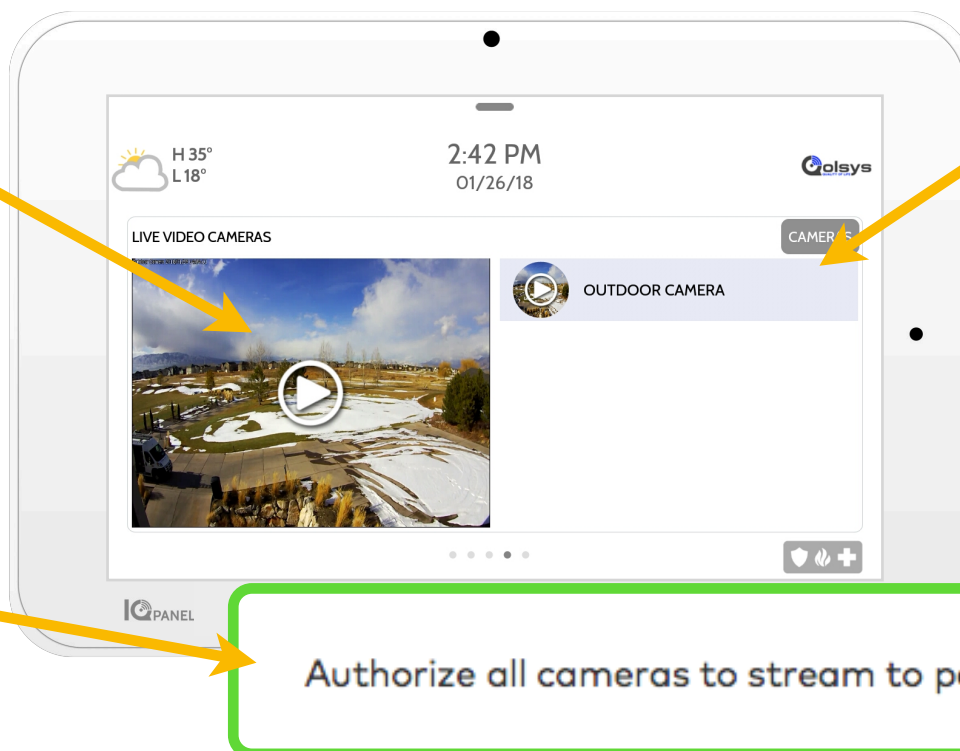


Camera View

Full screen mode can be activated by clicking on the play button for each individual camera.


Exit

Click on the red X icon to exit full screen mode.

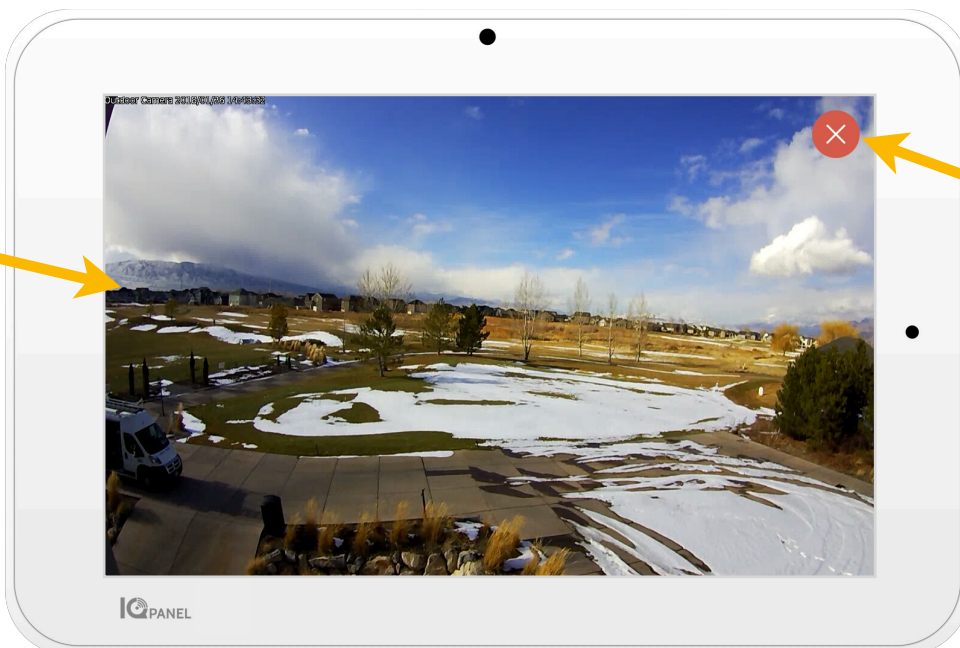

Live View with Audio

Listen in and speak to any room in the house using the Golsys Live View with Audio feature. This can be done from your mobile app or right from the 7" touch screen. If your camera supports two-way audio, the talk button will automatically appear on the live view page.

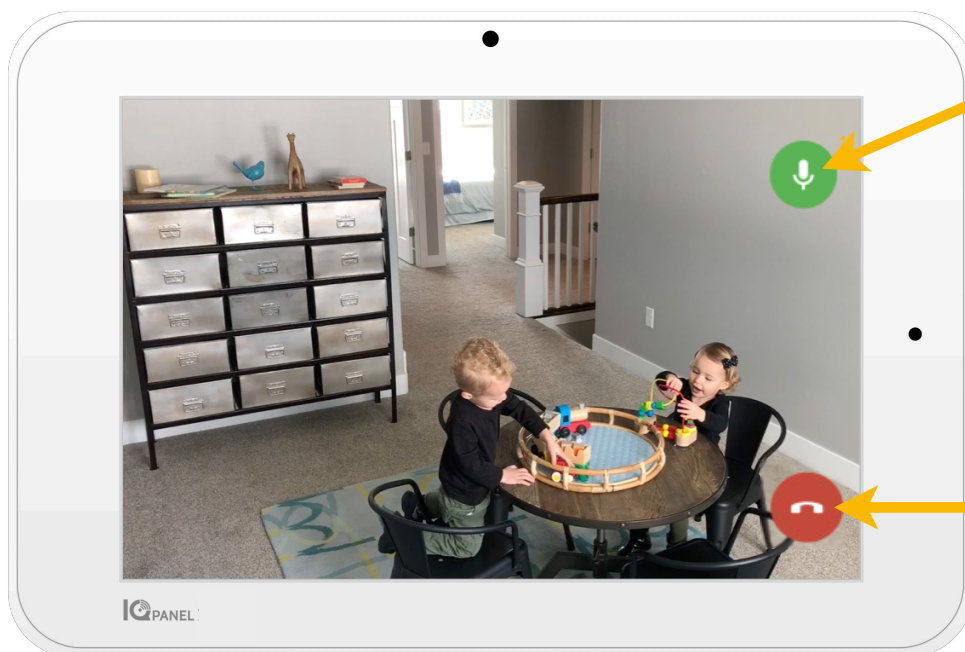

Talk

Press and hold while talking to use the two-way audio feature built into your camera.

End

Press this button to exit.

LIVE VIEW ~ with Audio ~ ON PANEL




Listen

Press to turn on audio.

Hold To Talk

Press and hold to talk.

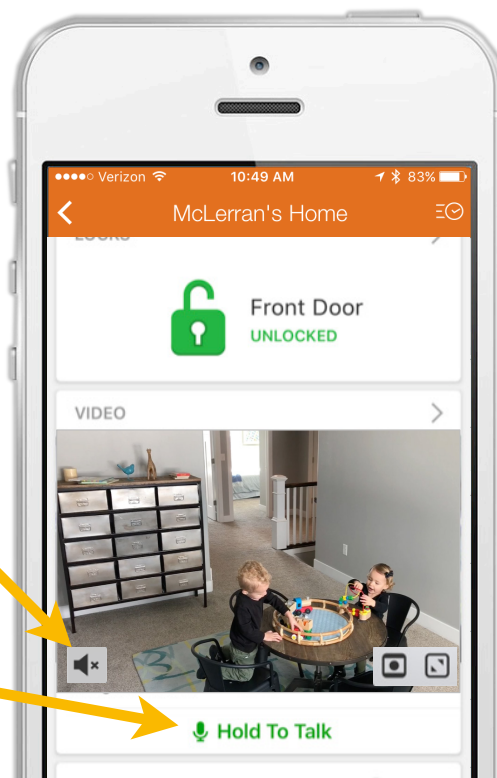

Live Answer for Doorbell Cameras

You can now talk directly to whoever is at your front door using the new Live Answer feature on your IQ Panel. When your doorbell button is pushed, video with audio will automatically pop up on your 7" touchscreen. You can answer the call, disarm the system and unlock the door all from the same screen. This allows you to verify who is at your front door and if you choose, let them in. Compatible with all SkyBell doorbell camera models.


Doorbell Notification

A doorbell notification will display on the screen when someone rings your doorbell. You can choose to answer or dismiss. This is a feature that you have to enable from your Alarm.com website.

Enable Notification

To enable this feature, log in to your Alarm.com website, navigate to your Video Settings, click on Video Device Info then check this box.

☒ Send button pushed notifications to panel. ?

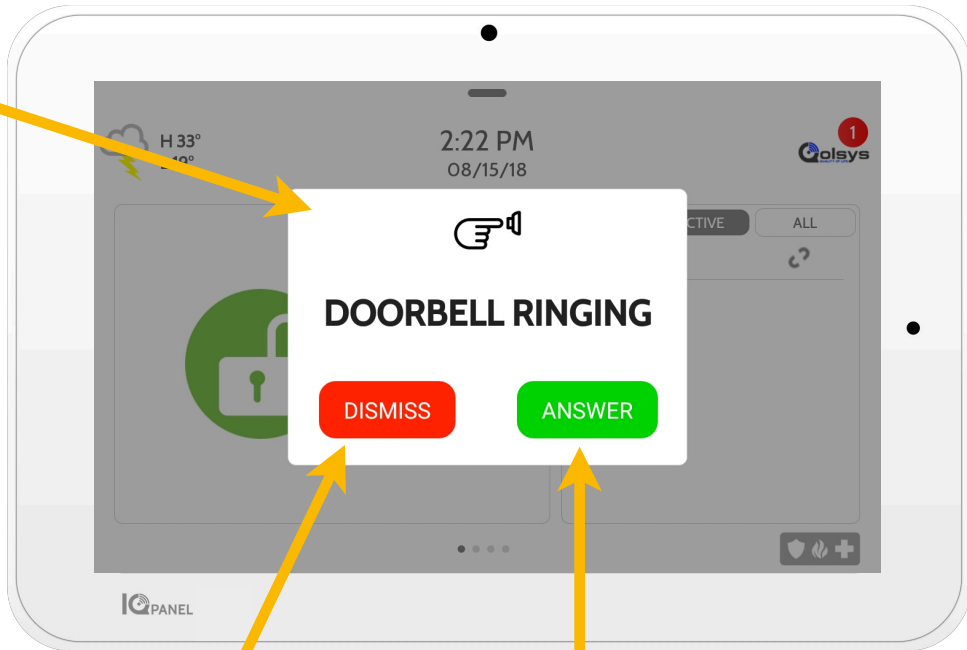

Dismiss

Press to dismiss doorbell.

Answer

Press to answer the doorbell. If answered, the feed from the doorbell will pop up on the screen.

Talk

Press and hold to talk to whoever is at the doorbell camera.

System Armed


If your system is armed, you can click this button to disarm the system.

Door Lock

If you have a door lock paired, you can click this button to unlock the door.

End

Press this button to end the call and exit Live View mode.

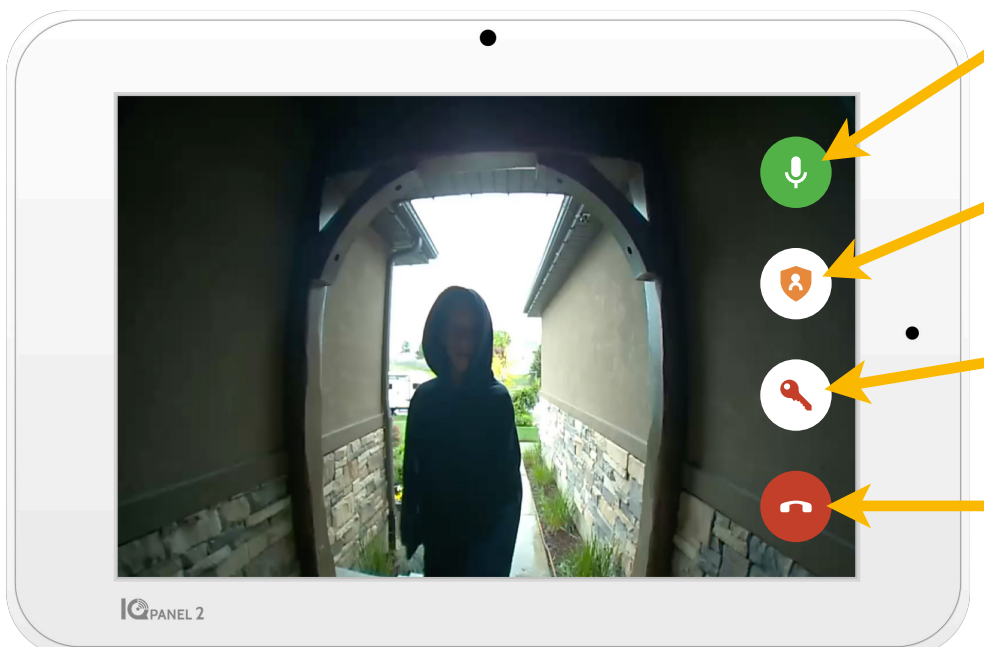

PARTITIONS

The IQ Panel allows for up to 4 partitions to be programmed. Partitions allows for the creation of zone groups in a home or building so that users can arm some sections of the property while leaving other areas disarmed. Partitioning enables greater personalization and functionality while simplifying installation. Each partition controls its local zone status, alerts and notifications. Any area or zone the needs to be armed or disarmed separately from the rest of the structure can be turned into a partition.

Alarm.com

Partitions control can be accessed from the Alarm.com customer site as well from your mobile app.

Partitions

	partition1	DISARMED
	partition2	DISARMED
	partition3	DISARMED
	partition4	DISARMED


Page Indicator


When separate partitions are enabled, the panel will display additional page indicators on the left side of your panel. These indicate how many partitions can be accessed from this screen.

Color Indicator

Each dot will be colored coded to indicate the arming status of that particular partition.

GREEN - Disarmed
ORANGE - Armed Stay
RED - Armed Away

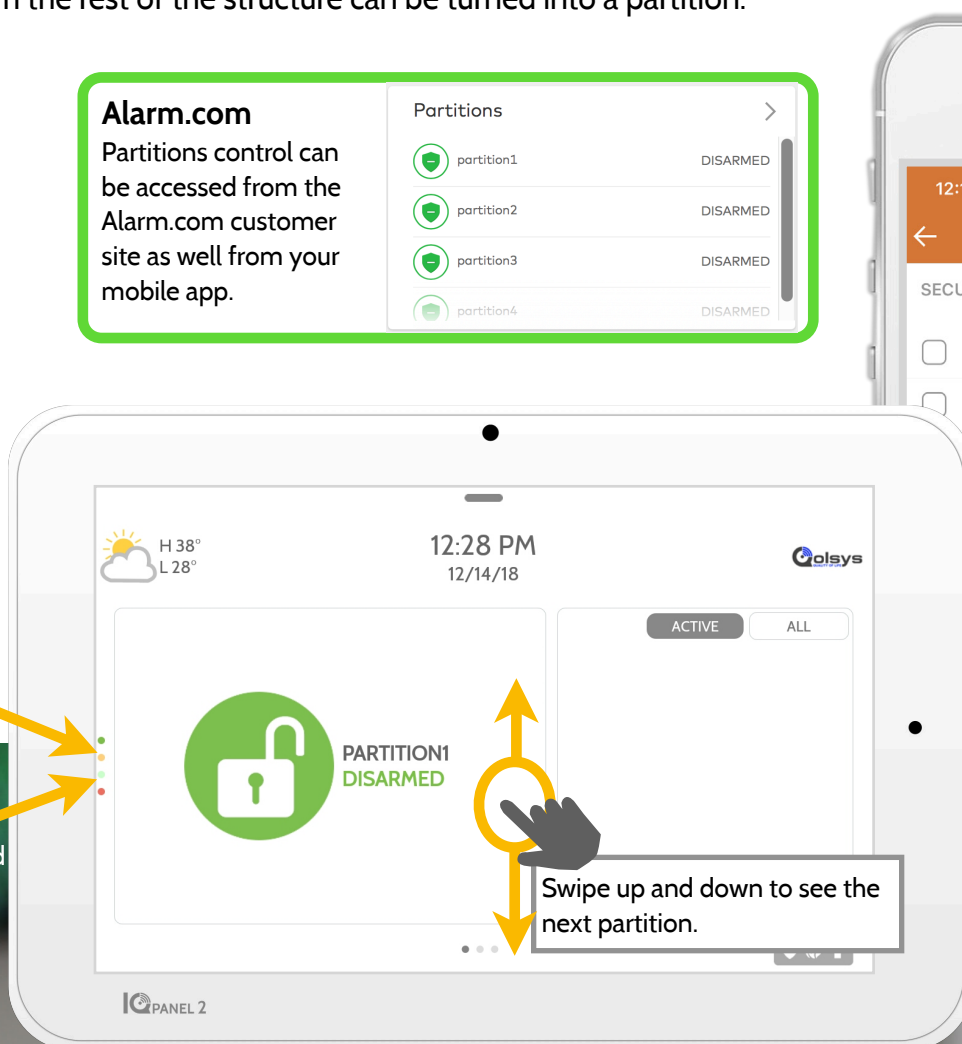

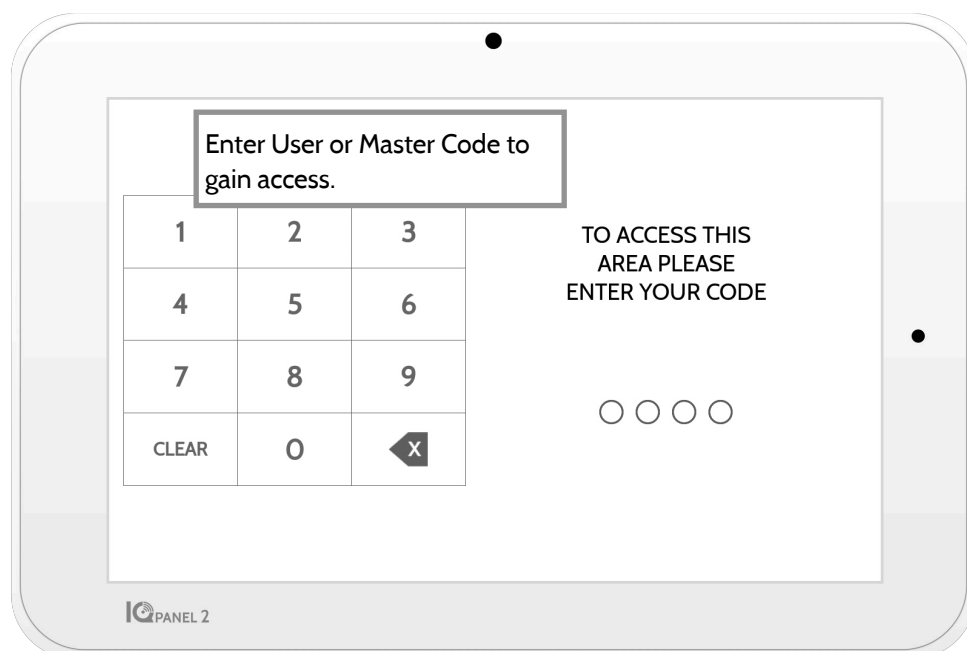

Important Note: If 6-digit codes are enabled in the panel but not changed in User Management, the panel will add two Zeros to the end of the original code. Example: If original user code is 1234 and 6-digit codes are enabled but the user code isn't changed, the new user code will be 123400.

Partitions Access

When the panel is locked or the screen times out, you will be required to re-enter your code to gain access. The code you enter will determine which partition you enter. Different codes may gain access to all four partitions at once or to one individual partition.


User Codes

Master codes give full access to Advanced Settings. Because the Master code would be entered here, you will not have to re-enter your code to gain access to the settings menu. User codes can be assigned to give access to arming and disarming functions in a particular partition. To assign single or multiple partitions access to a User code, enter the panel using the Master code and edit permissions in the User Management settings menu.

User Access

When creating a new user, you will be given the option to grant that user access to individual partition or all partitions. Only the number or partitions programmed will show up here. Simply check the box next to the desired option.

See page 13 for additional instructions on how to access the User Management menu.

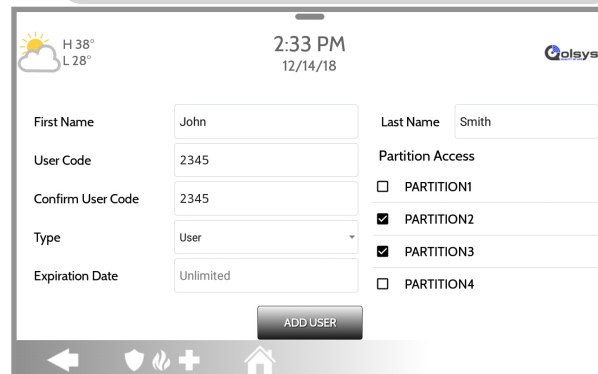


Lock Screen

To lock your individual partition, swipe down from the top to see the quick access menu. Press the "Lock Screen" icon in the top left of the menu. To switch from one partition to another, you must first lock the screen then re-enter a code for a different partition.

Note

Once you enter a partition, no more codes are required to access any settings or menus. It is recommended to lock the screen when done using the panel to prevent someone else from gaining access to these menus and your credentials.

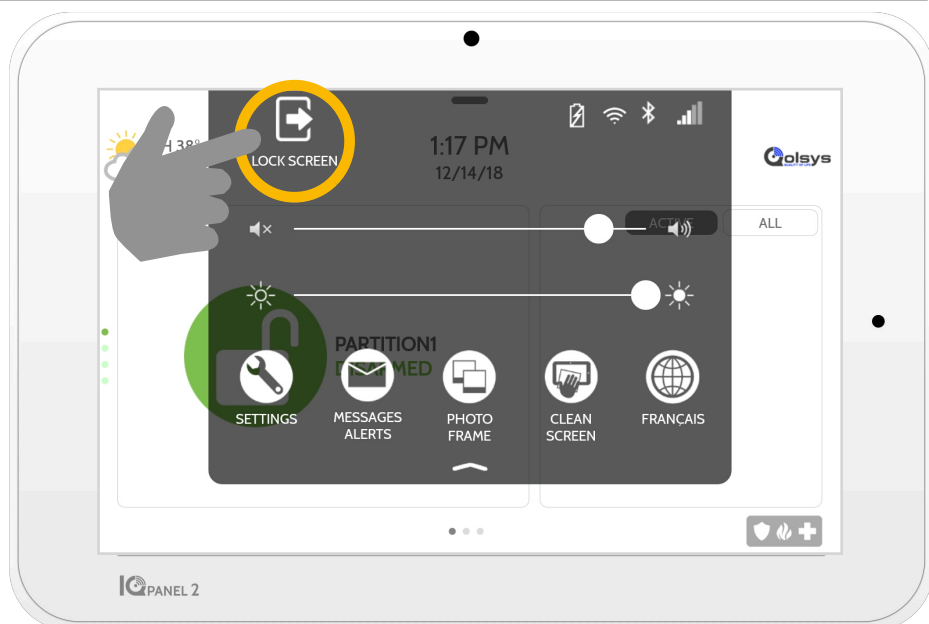

Exclusions:

You cannot partition Z-Wave or Alarm.com cameras today. This functionality will come at a later date via software update. Additionally, partitions 2-4 need their own siren. The main panel will not sound the siren during an alarm event for partitions 2-4. To add siren functionality to partitions 2-4, a secondary panel or wireless PowerG siren will need to be added.

FCC REGULATORY INFORMATION

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with radiation exposure limits set forth for uncontrolled environment. The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be collocated or operating in conjunction with any other antenna or transmitter.

IMPORTANT: Changes or modifications not expressly approved by Qolsys, Inc. could void the user's authority to operate the Product.

IC REGULATORY INFORMATION

This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Cautions:

1. Devices operating in the 5150-5250 MHz frequency band are restricted to operate in-door only.
2. Operation in the band 5150–5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.
3. Users should also be advised that high-power radars are allocated as primary users (i.e. priority users) of the bands 5250-5350 MHz and 5650-5850 MHz and that these radars could cause interference and/or damage to LE-LAN devices.

Cet appareil est conforme aux normes d'exemption de licence RSS d'Industry Canada. Son fonctionnement est soumis aux deux conditions suivantes : (1) cet appareil ne doit pas causer d'interférence et (2) cet appareil doit accepter toute interférence, notamment les interférences qui peuvent affecter son fonctionnement

CAN ICES-3 (B)/NMB-3(B)

Cet équipement est conforme aux limites d'exposition aux rayonnements IC établies pour un environnement non contrôlé. Cet équipement doit être installé et utilisé avec un minimum de 20 cm de distance entre la source de rayonnement, votre corps, et d'autres antennes ou transmetteurs.

Avertissement:

1. Les dispositifs fonctionnant dans la bande 5 150-5 250 MHz sont réservés uniquement pour une utilisation à l'intérieur.
2. Les dispositifs fonctionnant dans la bande 5 150-5 250 MHz sont réservés uniquement pour une utilisation à l'intérieur afin de réduire les risques de brouillage préjudiciable aux systèmes de satellites mobiles utilisant les mêmes canaux
3. De plus, les utilisateurs devraient aussi être avisés que les utilisateurs de radars de haute puissance sont désignés utilisateurs principaux (c.-à-d., qu'ils ont la priorité) pour les bandes 5 250-5 350 MHz et 5 650-5 850 MHz et que ces radars pourraient causer du brouillage et/ou des dommages aux dispositifs LAN-EL.

FCC/IC STATEMENT

Changes or modifications not expressly approved by Qolsys can void the user's authority to operate the Product. This Product has been tested and found to comply with FCC Rules.

This Product generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this Product does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the Product and receiver.
3. Connect the affected equipment and the Product to separate outlets, on different branch circuits. Consult the dealer or an experienced radio/TV technician for help.

Household Fire Safety Audit

Read this section for important information about fire safety. Most fires occur in the home. To minimize this danger, we recommend that a household fire safety audit be conducted and a fire escape plan be developed.

1. Are all electrical appliances and outlets in a safe condition? Check for frayed cords, overloaded lighting circuits, etc. If you are uncertain about the condition of your electrical appliances or household service, have a professional evaluate these units.
2. Are all flammable liquids stored safely in closed containers in a well-ventilated cool area? Cleaning with flammable liquids should be avoided.
3. Are fire-hazardous materials (e.g., matches) well out of reach of children?
4. Are furnaces and wood-burning appliances properly installed, clean and in good working order? Have a professional evaluate these appliances.

Fire Escape Planning

There is often very little time between the detection of a fire and the time it becomes deadly. It is thus very important that a family escape plan be developed and rehearsed.

1. Every family member should participate in developing the escape plan.
2. Study the possible escape routes from each location within the house. Since many fires occur at night, special attention should be given to the escape routes from sleeping quarters.

3. Escape from a bedroom must be possible without opening the interior door.

Consider the following when making your escape plans:

1. Make sure that all border doors and windows are easily opened. Ensure that they are not painted shut, and that their locking mechanisms operate smoothly.

2. If opening or using the exit is too difficult for children, the elderly or handicapped, plans for rescue should be developed. This includes making sure that those who are to perform the rescue can promptly hear the fire warning signal.

3. If the exit is above the ground level, an approved fire ladder or rope should be provided as well as training in its use.

4. Exits on the ground level should be kept clear. Be sure to remove snow from exterior patio doors in winter; outdoor furniture or equipment should not block exits.

5. Each person should know the predetermined assembly point where everyone can be accounted for (e.g., across the street or at a neighbor's house). Once everyone is out of the building, call the fire department.

6. A good plan emphasizes quick escape. Do not investigate or attempt to fight the fire, and do not gather belongings as this can waste valuable time. Once outside, do not re-enter the house. Wait for the fire department.

7. Write the fire escape plan down and rehearse it frequently so that should an emergency arise, everyone will know what to do. Revise the plan as conditions change, such as the number of people in the home, or if there are changes to the building's construction.

8. Make sure your fire warning system is operational by conducting weekly tests. If you are unsure about system operation, contact your installer.

9. We recommend that you contact your local fire department and request further information on fire safety and escape planning. If available, have your local fire prevention officer conduct an in-house fire safety inspection.